


NEW PRODUCT LINE



engineering
trasporto sollevamento

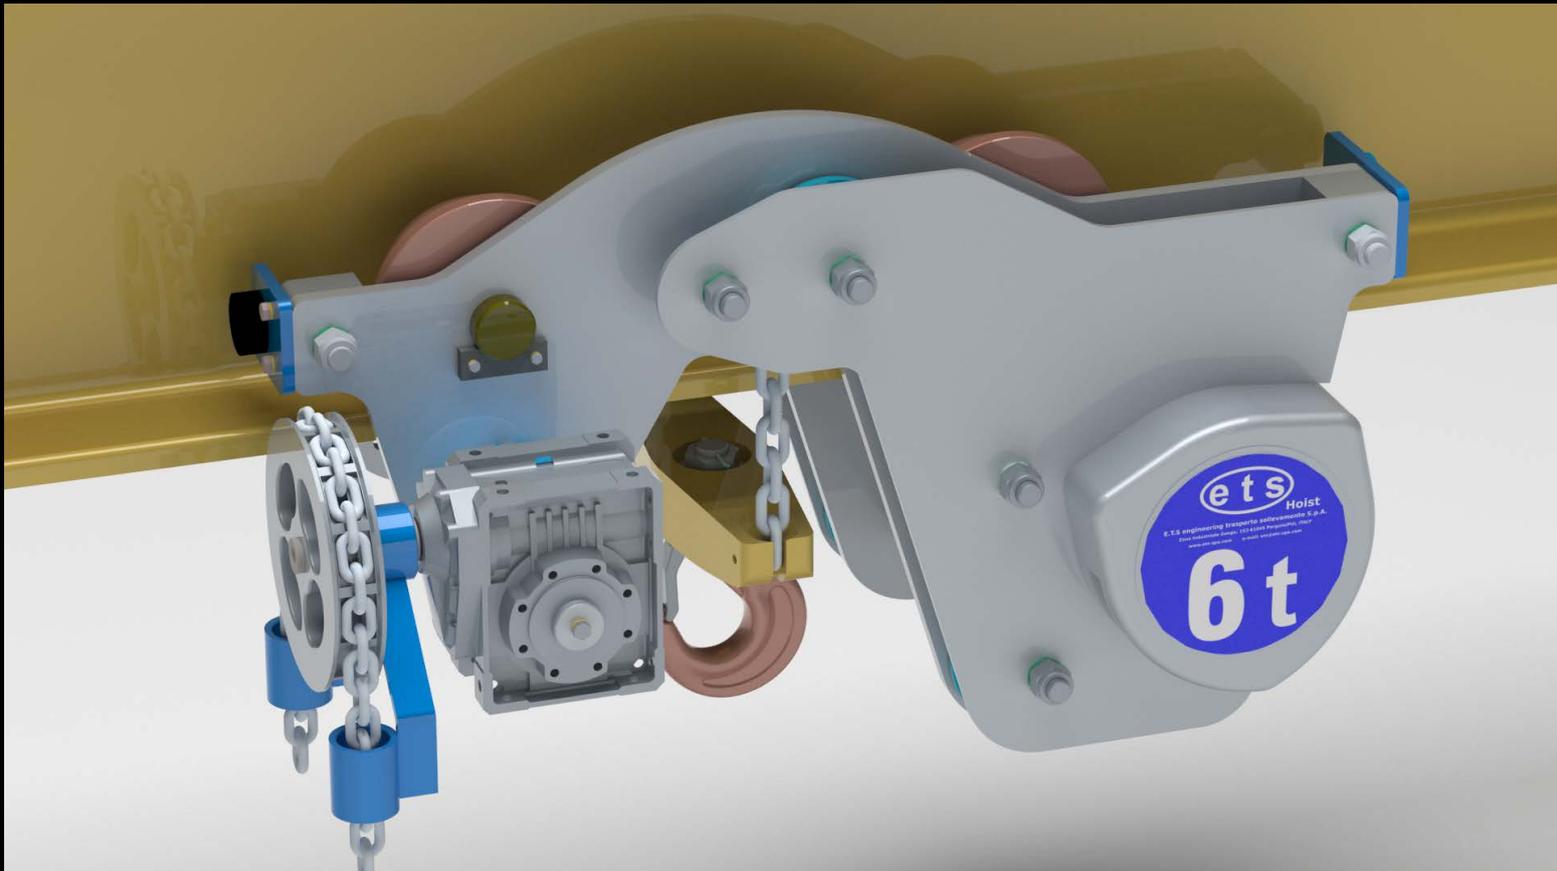

Low Headroom Hoist

The way to lift and carry your ideas



E.T.S engineering trasporto sollevamento s.p.a.
Zona Ind.le Ganga, 153 - 61045 Pergola (PU) Italy
Phone +39 0721/775450, Fax +39 0721/775451
ets@ets-spa.com - www.ets-spa.com

LOW-HEADROOM HOIST ULH





Main Characteristics:

- Bronze Solid Wheels
- Stainless Steel Handling Chain
- Painting Suitable for Outdoor use
- Operating temperature -10°C/+60°C

Optionals:

- Operating Temperature -40°C/+40°C
- Stainless Steel Wheels
- Compliance to Norsok
- Compliance to EAC Russia
- Worm Gear and Rack & Pinion system

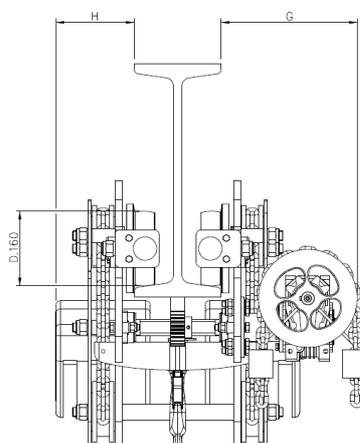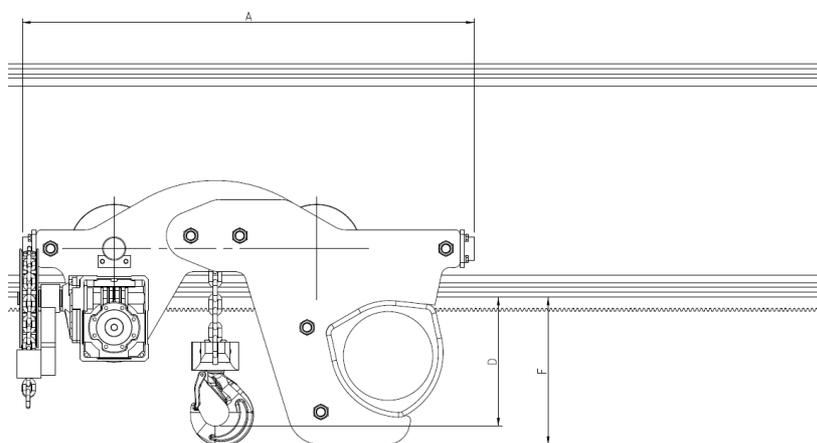

CAPACITY	Kg.	2.000	3.000	5.000	6.000	7.500	10.000
Model:		ULH2000	ULH3000	ULH5000	ULH6000	ULH7500	ULH10000
HOISTING GROUPS	n	2	2	2	2	2	2
FALLS	n	1 + 1	1 + 1	1 + 1	1 + 1	2 + 2	2 + 2
HOISTING EVERY 5 MT OF HANDLING	mm	32	32	26	13	26	7
PULL ON CHAIN	kg	30	30	38	38	40	40
DIMENSION A	mm	775	775	960	960	960	960
DIMENSION D (HOIST CLOSED)	mm	200	200	256	256	350	350
DIMENSION F	mm	250	250	316	316	410	410
DIMENSION G	mm	210	210	245	245	270	270
DIMENSION H	mm	210	210	245	245	270	270
WEIGHT m 3 x 2.50 OF CHAIN	kg	60	90	120	120	250	250
ADDED WEIGHT FOR 1 MT. OF CHAIN	kg	3,40	4,00	5,50	5,50	10,00	10,00