


PLINTI DI FONDAZIONE PER GRU A BANDIERA A COLONNA



INSTALLAZIONE GRU SU PLINTO DI FONDAZIONE "FISSAGGIO TIPO F"

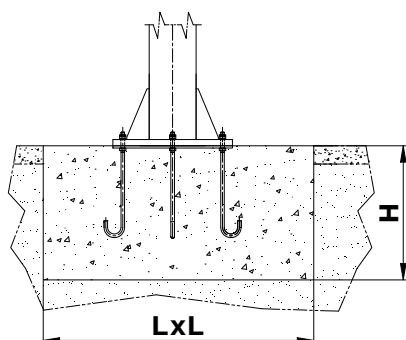

Portata (kg)	125								
Sbraccio SB (m)	2	3	4	5	6	7	8	9	10
L x L (mm)	1200				1500	1650	1750	2000	
H (mm)	800				800	1000	1000	1000	

250								
2	3	4	5	6	7	8	9	10
1200	1500	1750					2000	2100
800	800	1000					1000	1000

Portata (kg)	500								
Sbraccio SB (m)	2	3	4	5	6	7	8	9	10
L x L (mm)	1200	1500	1750		2000			2300	2400
H (mm)	800	800	1000		1000			1000	1000

1.000								
2	3	4	5	6	7	8	9	10
1750	2000			2200		2400	2700	2800
1000	1000			1000		1000	1000	1000

Portata (kg)	2.000								
Sbraccio SB (m)	2	3	4	5	6	7	8	9	10
L x L (mm)	2000	2200		2400	2600	2800	3200	3300	
H (mm)	1000	1000		1000	1200		1200	1200	

3.200								
2	3	4	5	6	7	8	9	10
2000	2300	2400	2600	2800	3000	3200	3800	4000
1000	1000	1000	1200				1300	1300

Portata (kg)	5.000								
Sbraccio SB (m)	2	3	4	5	6	7	8	9	10
L x L (mm)	2600	2800	3000	3200		3800	4000	4200	
H (mm)	1200	1200				1300	1300	1300	

6.300								
2	3	4	5	6	7	8	9	10
3000	3200	3800		4000		4200	4400	
1200	1300	1300		1300		1300	1300	

Portata (kg)	8.000								
Sbraccio SB (m)	2	3	4	5	6	7	8	9	10
L x L (mm)	3000	3200	3600	3800	4000	4200	4400	4500	4600
H (mm)	1200	1200	1300	1300	1300	1300	1300	1300	1300

10.000								
2	3	4	5	6	7	8	9	10
3200	3800	4000			4400	4600	4800	5000
1300	1300	1300			1300	1300	1300	1300

NB: le dimensioni dei plinti sono puramente indicative. Il plinto di fondazione deve essere dimensionato da tecnici qualificati in considerazione della reale consistenza del terreno e della pressione massima ammessa sullo stesso.